

INSERT+ series



PERFORMANCE
iN LIGHTING

powered by
GEWISS

INSERT+ series

Walk with safety

This successful series has been synonymous with recessed wall luminaires since 1980. Style and technique follow a direction of evolution, not revolution. Initially offered with traditional light sources, the INSERT series has evolved into an LED offering. This series provides improved visual comfort; energy saving is an accent, and marker-light is illuminating where needed.

The retrofit subframe Kit may offer an essential reduction in installation costs (INSERT+ 1 / 2).

The INSERT+ series, available in recess wall (ZERO, 1 / 2 / 3 / V1 / V2) surface mount (SM ZERO / 1), marine brass (MARINE), full glass for diffuse light emission (GLASS), and bollard (POST ZERO / V1 / V2) options, provides much more than fittings. It gives you total design cohesiveness.



Scan the QR-code for the latest information



INSERT+ ZERO
p. 4



**INSERT+ ZERO
CLIP**
p. 4



**INSERT+ ZERO
GLASS**
p. 5



**INSERT+ ZERO
SM**
p. 6





**INSERT+ ZERO
SM GLASS**
p. 7



**INSERT+ 1
INSERT+ 2**
p. 8



**INSERT+ 1
MARINE**
p. 9

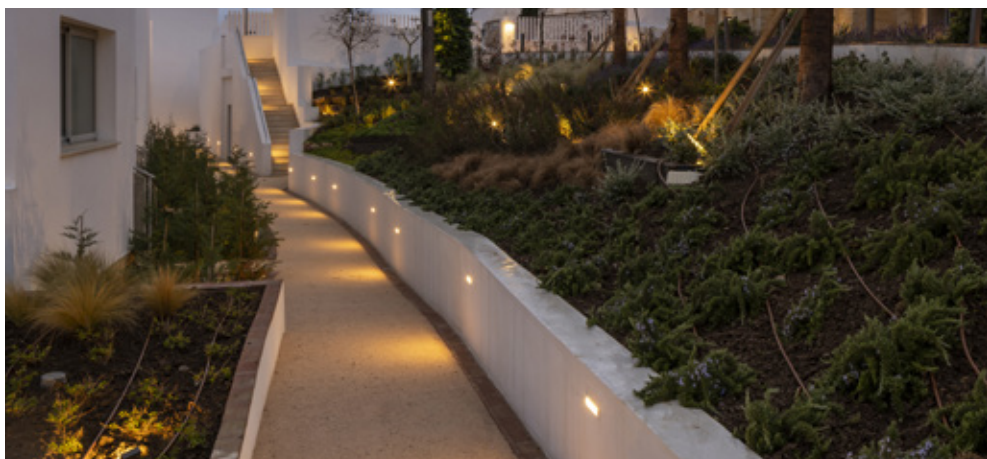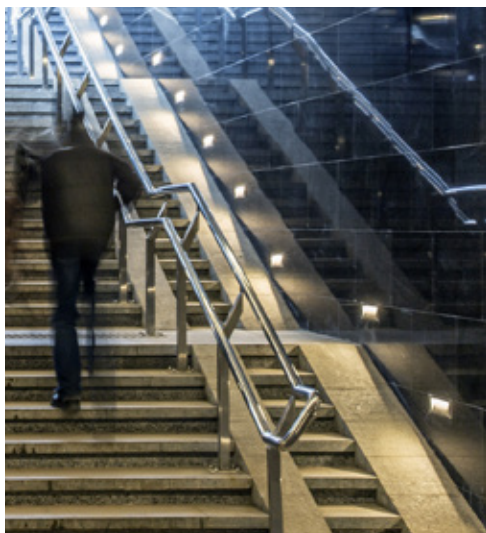

INSERT+ 1 V
INSERT+ 2 V
p. 12



INSERT+ 1 V
GLASS
p. 15



INSERT+ 1 V
SM
p. 16



INSERT+ 1 V
SM GLASS
p. 19



INSERT+ 3
p. 20



INSERT+ ZERO
POST
p. 22



INSERT+ 1 V
POST
p. 23

INSERT+ ZERO




Scan the QR-code for the latest information

- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured


INSERT+ ZERO

IP65 - IK08

LUMINAIRE WATTAGE [W]	CLASS	EMEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	UNICA
Power LED 220-240 V 50/60 Hz											
4.5	I	-	80	4000	A29/M	-	530	142	■	304111	✓
4.5	I	-	80	3000	A29/M	-	511	125	■	304110	✓
4.5	I	-	80	4000	A29/M	-	530	142	■	304113	✓
4.5	I	-	80	3000	A29/M	-	511	125	■	304112	✓
4.5	I	-	80	4000	A29/M	-	530	142	□	304109	✓
4.5	I	-	80	3000	A29/M	-	511	125	□	304108	✓



INSERT+ ZERO CLIP




Scan the QR-code for the latest information

- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

INSERT+ ZERO CLIP


IP65 - IK08

LUMINAIRE WATTAGE [W]	CLASS	EMEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	UNICA
Power LED 220-240 V 50/60 Hz											
4.5	I	-	80	3000	A/M	-	511	142	■	3100064	✓
4.5	I	-	80	3000	A/M	-	511	142	■	3100066	✓
4.5	I	-	80	3000	A/M	-	511	142	□	3100062	✓



2700K versions are available on web

INSERT+ ZERO GLASS



Scan the QR-code for the latest information

WH-87 / White / Textured

INSERT+ ZERO GLASS

IP65 - IK05

LUMINAIRE WEIGHT (kg)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	LINKA
-----------------------	-------	------	-----	--------	-------	------------	--------------------------------	-----------------------------	----------------	-------------	-------

Power LED 220-240 V 50/60 Hz

4.5	I	-	80	3000	S/EW	-	511	78	<input type="checkbox"/>	3114950	✓
-----	---	---	----	------	------	---	-----	----	--------------------------	----------------	---



INSERT+ ZERO SM





Scan the QR-code for the latest information

- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

INSERT+ ZERO SM

IP65 - IK08

LUMINAIRE WEIGHT (kg)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	UNICA
Power LED 220-240 V 50/60 Hz											
4	I	-	80	4000	A/W	-	483	157	<input checked="" type="checkbox"/>	3118110	<input checked="" type="checkbox"/>
4	I	-	80	3000	A/W	-	442	151	<input checked="" type="checkbox"/>	3118107	<input checked="" type="checkbox"/>
4	I	-	80	2700	A/W	-	435	148	<input checked="" type="checkbox"/>	3118104	<input checked="" type="checkbox"/>
4	I	-	80	4000	A/W	-	483	157	<input checked="" type="checkbox"/>	3118109	<input checked="" type="checkbox"/>
4	I	-	80	3000	A/W	-	442	151	<input checked="" type="checkbox"/>	3118106	<input checked="" type="checkbox"/>
4	I	-	80	2700	A/W	-	435	148	<input checked="" type="checkbox"/>	3118103	<input checked="" type="checkbox"/>
4	I	-	80	4000	A/W	-	483	157	<input type="checkbox"/>	3118108	<input checked="" type="checkbox"/>
4	I	-	80	3000	A/W	-	442	151	<input type="checkbox"/>	3118105	<input checked="" type="checkbox"/>
4	I	-	80	2700	A/W	-	435	148	<input type="checkbox"/>	3118102	<input checked="" type="checkbox"/>

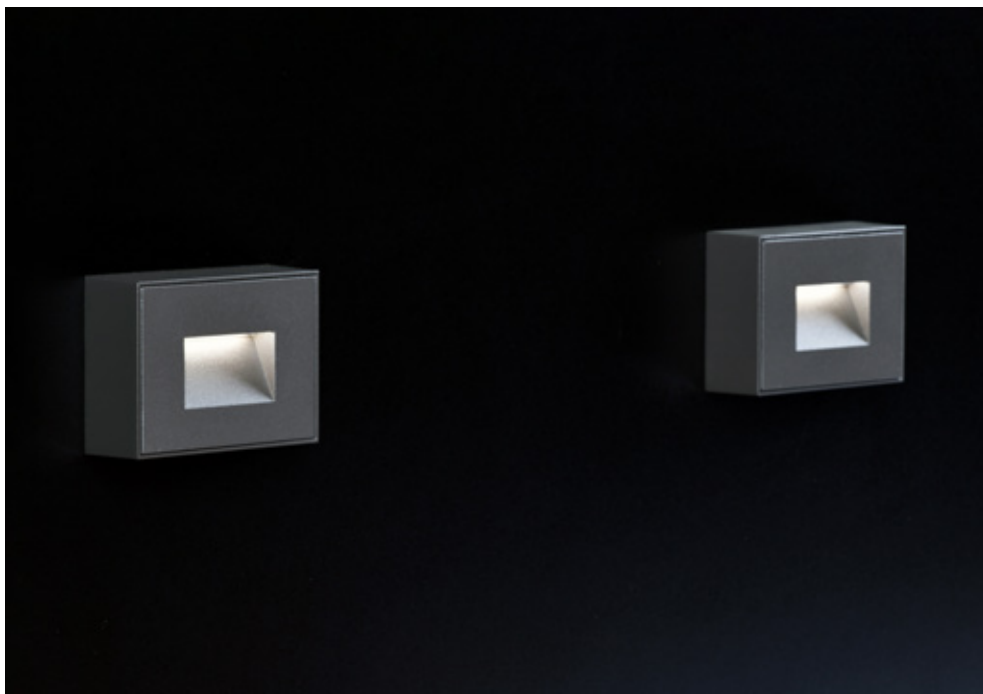

INSERT+ ZERO SM GLASS




Scan the QR-code for the latest information

- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured


INSERT+ ZERO SM GLASS

IP65 - IK05

LUMINAIRE WATTAGE (W)	CLASS	ENERG	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	UNICA
Power LED 220-240 V 50/60 Hz											
4	I	-	80	4000	S/EW	-	483	89	<input checked="" type="checkbox"/>	3118119	<input checked="" type="checkbox"/>
4	I	-	80	3000	S/EW	-	442	81	<input checked="" type="checkbox"/>	3118116	<input checked="" type="checkbox"/>
4	I	-	80	2700	S/EW	-	435	80	<input checked="" type="checkbox"/>	3118113	<input checked="" type="checkbox"/>
4	I	-	80	4000	S/EW	-	483	89	<input checked="" type="checkbox"/>	3118118	<input checked="" type="checkbox"/>
4	I	-	80	3000	S/EW	-	442	81	<input checked="" type="checkbox"/>	3118115	<input checked="" type="checkbox"/>
4	I	-	80	2700	S/EW	-	435	80	<input checked="" type="checkbox"/>	3118112	<input checked="" type="checkbox"/>
4	I	-	80	4000	S/EW	-	483	89	<input type="checkbox"/>	3118117	<input checked="" type="checkbox"/>
4	I	-	80	3000	S/EW	-	442	81	<input type="checkbox"/>	3118114	<input checked="" type="checkbox"/>
4	I	-	80	2700	S/EW	-	435	80	<input type="checkbox"/>	3118111	<input checked="" type="checkbox"/>



INSERT+ 1/2




Scan the QR-code for the latest information

- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

INSERT+ 1

IP65 - IK07


LUMINAIRE (WATTAGE [W])	CLASS	EMEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	UNICA
6	I	-	80	4000	A37/M	-	850	275	■	304117	✓
6	I	-	80	3000	A37/M	-	825	250	■	304116	✓
6	I	-	80	4000	A37/M	-	850	275	■	304119	✓
6	I	-	80	3000	A37/M	-	825	250	■	304118	✓
6	I	-	80	4000	A37/M	-	850	275	□	304115	✓
6	I	-	80	3000	A37/M	-	825	250	□	304114	✓



INSERT+ 2

IP65 - IK07 - 650 °C

LUMINAIRE (WATTAGE [W])	CLASS	EMEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	UNICA
10	I	-	80	4000	A25/W	-	1410	553	■	304123	✓
10	I	-	80	3000	A25/W	-	1350	503	■	304122	✓
10	I	-	80	4000	A25/W	-	1410	553	■	304125	✓
10	I	-	80	3000	A25/W	-	1350	503	■	304124	✓
10	I	-	80	4000	A25/W	-	1410	553	□	304121	✓
10	I	-	80	3000	A25/W	-	1350	503	□	304120	✓



INSERT+ 1 MARINE




Scan the QR-code for the latest information

BR-10 / Natural brass / Glossy

INSERT+ 1 MARINE

IP65 - IK07

LUMINAIRE (WATTAGE [W])	CLASS	EMC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	UNICA
Power LED 220-240 V 50/60 Hz											
6	I	-	80	4000	A37/M	-	850	354	BR-10	304792	✓
6	I	-	80	3000	A37/M	-	825	325	BR-10	304791	✓



Mandatory accessories

DESCRIPTION	COLOR	PART NUMBER	UNICA
INSERT+ 1 MARINE			
Recessed box INSERT+ 1		310475	✓



310475



INSERT conversion solutions

Adaptor kit for converting INSERT series luminaires into INSERT+ LED (incandescent or fluorescent sources).

Advantages of LED conversion:

- immediate energy saving;
- speed of installation;
- no masonry work.



	INSERT 1		INSERT+ 1
	Traditional	Fluorescent	LED
Light source			LED
Luminaire wattage [W]	40	9	6
Annual consumption [kW]	175	39	26



	INSERT 2		INSERT+ 2
	Traditional	Fluorescent	LED
Light source			LED
Luminaire wattage [W]	60	18	10
Annual consumption [kW]	263	79	44





Examples of operation on an average dark hours estimate equal to 4376 h / year.

Mandatory accessories

DESCRIPTION	COLOR	PART NUMBER	UNICA
INSERT+ 1			
Recessed box INSERT+ 1		310475	✓
INSERT+ 2			
Recessed box Insert + 2		310490	✓




310475

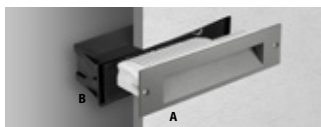


Complete unit

1A+1B = please order 2 codes

COMPONENTS
A luminaire
B recessed fixing kit



310475




310490

Optional accessories

DESCRIPTION	COLOR	PART NUMBER	UNICA
INSERT+ 1			
Adaptor INSERT+ 1 (retrofit kit Insert 1)	□	310476	✓
Adaptor INSERT+ 1 (retrofit kit Insert 1)	■	310477	✓
Adaptor INSERT+ 1 (retrofit kit Insert 1)	■	310478	✓
INSERT+ 2			
Adaptor INSERT+ 2 (retrofit kit Insert 2)	□	310487	✓
Adaptor INSERT+ 2 (retrofit kit Insert 2)	■	310488	✓
Adaptor INSERT+ 2 (retrofit kit Insert 2)	■	310489	✓
Connection Kit Y 3-way Ø 14-17 mm IP68		310495	✓
Connection Kit Y 3-way Ø 7-10.5 mm IP68		310496	✓



310495
310496

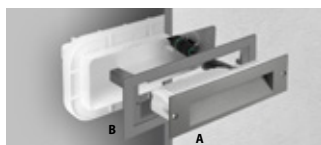

Complete unit


1A+1C = please order 2 codes

COMPONENTS
A luminaire
C adaptor


INSERT 1



INSERT 2




INSERT+ 1



310476
340477
310478

INSERT+ 2



310487
310488
310489

INSERT+ 1/2 V




Scan the QR-code for the latest information

- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

INSERT+ 1 V

IP65 - IK06


LUMINAIRE WATTAGE (W)	CLASS	ENEC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	ULCA
Power LED 220-240 V 50/60 Hz											
4	I	-	80	4000	A/EW	-	418	197	■	3118537	✓
4	I	-	80	3000	A/EW	-	377	184	■	3118534	✓
4	I	-	80	4000	A/EW	-	418	197	■	3118536	✓
4	I	-	80	3000	A/EW	-	377	184	■	3118445	✓
4	I	-	80	4000	A/EW	-	418	197	□	3118535	✓
4	I	-	80	3000	A/EW	-	377	184	□	3118444	✓



INSERT+ 2 V

IP65 - IK07

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	ULCA
Power LED 220-240 V 50/60 Hz											
9	I	-	80	4000	A/EW	-	1318	634	■	3118198	✓
9	I	-	80	3000	A/EW	-	1197	592	■	3118195	✓
9	I	-	80	4000	A/EW	-	1318	634	■	3118197	✓
9	I	-	80	3000	A/EW	-	1197	592	■	3118194	✓
9	I	-	80	4000	A/EW	-	1318	634	□	3118196	✓
9	I	-	80	3000	A/EW	-	1197	592	□	3118193	✓
Power LED - dimmable DALI 220-240 V 50/60 Hz											
9	I	-	80	4000	A/EW	-	1318	634	■	3118204	✓
9	I	-	80	3000	A/EW	-	1197	592	■	3118201	✓
9	I	-	80	4000	A/EW	-	1318	634	■	3118203	✓
9	I	-	80	3000	A/EW	-	1197	592	■	3118200	✓
9	I	-	80	4000	A/EW	-	1318	634	□	3118202	✓
9	I	-	80	3000	A/EW	-	1197	592	□	3118199	✓



Mandatory accessories

DESCRIPTION	COLOR	PART NUMBER	ULCA
INSERT+ 1 V			
Recessed box INSERT+ 1		310475	✓
INSERT+ 2 V			
Recessed box Insert + 2		310490	✓



310475



310490

Optional accessories

DESCRIPTION	COLOR	PART NUMBER	ULCA
INSERT+ 1/2 V			
Connection Kit Y 3-way Ø 7-10.5 mm IP68		310496	✓
Connection Kit Y 3-way Ø 14-17 mm IP68		310495	✓



310495
310496





INSERT+ 1 V GLASS




Scan the QR-code for the latest information

WH-87 / White / Textured

INSERT+ 1 V GLASS

IP65 - IK06

LUMINAIRE WATTAGE (W)	CLASS	EMC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	ULCA
Power LED 220-240 V 50/60 Hz											
4	I	-	80	4000	S/EW	-	418	98	<input type="checkbox"/>	3118541	✓
4	I	-	80	3000	S/EW	-	377	92	<input type="checkbox"/>	3118538	✓



Mandatory accessories

DESCRIPTION	COLOR	PART NUMBER	ULCA
INSERT+ 1 V GLASS			
Recessed box INSERT+ 1		310475	✓



310475



INSERT+ 1 V SM




Scan the QR-code for the latest information

- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

INSERT+ 1 V SM

IP65 - IK06

LUMINAIRE (WATTAGE [W])	CLASS	EMC	CR	REGLVM	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	UNICA
Power LED 220-240 V 50/60 Hz											
4	I	-	80	4000	A/EW	-	418	197	<input checked="" type="checkbox"/>	3118464	<input checked="" type="checkbox"/>
4	I	-	80	3000	A/EW	-	377	184	<input checked="" type="checkbox"/>	3118461	<input checked="" type="checkbox"/>
4	I	-	80	4000	A/EW	-	418	197	<input checked="" type="checkbox"/>	3118463	<input checked="" type="checkbox"/>
4	I	-	80	3000	A/EW	-	377	184	<input checked="" type="checkbox"/>	3118460	<input checked="" type="checkbox"/>
4	I	-	80	4000	A/EW	-	418	197	<input checked="" type="checkbox"/>	3118462	<input checked="" type="checkbox"/>
4	I	-	80	3000	A/EW	-	377	184	<input checked="" type="checkbox"/>	3118459	<input checked="" type="checkbox"/>







INSERT+ 1 V SM GLASS




Scan the QR-code for the latest information

- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

INSERT+ 1 V SM GLASS

IP65 - IK06

LUMINAIRE WEIGHT [kg]	CLASS	EMC	CR	REGLVM	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	UNICA
Power LED 220-240 V 50/60 Hz											
4	I	-	80	4000	S/EW	-	418	98	■	3118470	✓
4	I	-	80	3000	S/EW	-	377	92	■	3118467	✓
4	I	-	80	4000	S/EW	-	418	98	■	3118469	✓
4	I	-	80	3000	S/EW	-	377	92	■	3118466	✓
4	I	-	80	4000	S/EW	-	418	98	□	3118468	✓
4	I	-	80	3000	S/EW	-	377	92	□	3118465	✓



INSERT+ 3




Scan the QR-code for the latest information

- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured

INSERT+ 3 A/W

IP66 - IK10

LUMINAIRE WATTAGE [W]	CLASS	EMEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	UNICA
Power LED 220-240 V 50/60 Hz											
27	I	-	80	4000	A/W	-	4140	1592	■	3100879	✓
27	I	-	80	3000	A/W	-	4020	1502	■	3100877	✓
27	I	-	80	4000	A/W	-	4140	1592	■	3100878	✓
27	I	-	80	3000	A/W	-	4020	1502	■	3100876	✓



INSERT+ 3 A26/W

IP66 - IK10

LUMINAIRE WATTAGE [W]	CLASS	EMEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOR / FINISH	PART NUMBER	UNICA
Power LED 220-240 V 50/60 Hz											
26	I	-	70	4000	A26/W	-	3585	1399	■	3100875	✓
26	I	-	70	3000	A26/W	-	3450	1388	■	3100881	✓
26	I	-	70	4000	A26/W	-	3585	1399	■	3100882	✓
26	I	-	70	3000	A26/W	-	3450	1388	■	3100880	✓

Mandatory accessories

DESCRIPTION	COLOR	PART NUMBER	UNICA
INSERT+3			
Recessed box INSERT+3		3100883	✓



3100883

Optional accessories

DESCRIPTION	COLOR	PART NUMBER	UNICA
INSERT+ 3			
Stainless steel, anti-tamper locking screws		3100992	✓
Connection Kit Y 3-way Ø 14-17 mm IP68		310495	✓
Connection Kit Y 3-way Ø 7-10.5 mm IP68		310496	✓





3100992



310495
310496

Identifying and classifying our optics



INSERT+3 A/W

INSERT+3 A26/W



INSERT+ ZERO POST




Scan the QR-code for the latest information

- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured

INSERT+ ZERO POST 300

IP65 - IK08

LUMINAIRE WATTAGE (W)	CLASS	DIRC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	UNICA
Power LED 220-240 V 50/60 Hz											
4	I	-	80	4000	A/W	-	483	157	■	3118129	✓
4	I	-	80	3000	A/W	-	377	151	■	3118127	✓
4	I	-	80	2700	A/W	-	435	148	■	3118125	✓
4	I	-	80	4000	A/W	-	483	157	■	3118128	✓
4	I	-	80	3000	A/W	-	377	151	■	3118126	✓
4	I	-	80	2700	A/W	-	435	148	■	3118124	✓



INSERT+ 1 V POST




Scan the QR-code for the latest information

- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured

INSERT+ 1 V POST 600

IP65 - IK06

LUMINAIRE WATTAGE (W)	CLASS	DIRC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	UNICA
Power LED 220-240 V 50/60 Hz											
4	I	-	80	4000	A/EW	-	418	197	■	3118477	✓
4	I	-	80	3000	A/EW	-	377	184	■	3118475	✓
4	I	-	80	4000	A/EW	-	418	197	■	3118476	✓
4	I	-	80	3000	A/EW	-	377	184	■	3118474	✓



The data contained in this brochure is for reference purposes only and does not involve any commitment by PERFORMANCE iN LIGHTING S.p.A., which reserves the right to make all necessary changes without prior notice. Partial or complete reproduction of this brochure is forbidden.



PERFORMANCE iN LIGHTING S.p.A.

Viale del Lavoro 9/11
37030 Colognola ai Colli (VR) - Italy
T +39 045 61 59 211

www.performanceinlighting.com

