

MIMIK 10



Wall sconce series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and mounting plate.
- Extra-clear, flat, tempered silk-screened soda-lime glass diffuser.
- Micro-prismatic patterned, flat, tempered silk-screened soda-lime glass diffuser (FLAT versions).
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- High-transmittance transparent optics.
- DarkSky approved when ordered with single light emission only, and in 3000K or below.

- Single (M) or dual (B) light emission.
- IESNA Type III light distribution (FLAT).
- IESNA Type III light distribution.
- 20° x 20° beam angle (C/I).
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Customizing facade faceplate available for MIMIK FLAT versions (ordered separately).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.



FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured

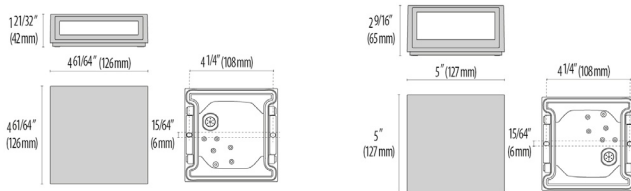

MIMIK
10 FLAT

MIMIK
10

Scan here
for installation
instructions



WATTAGE	
MIMIK 10 M T3	5W
MIMIK 10 M T3	10W
MIMIK 10 M C/I	5W
MIMIK 10 M C/I	10W
MIMIK 10 FLAT M	5W
MIMIK 10 FLAT M	10W
MIMIK 10 FLAT B	10W
MIMIK 10 B C/I	10W
MIMIK 10 B C/I+T3	10W

LUMEN OUTPUT		2700K	3000K	3500K	4000K
MIMIK 10 M T3	5W	292	314	336	358
MIMIK 10 M T3	10W	505	542	579	617
MIMIK 10 M C/I	5W	307	349	390	432
MIMIK 10 M C/I	10W	607	653	699	745
MIMIK 10 FLAT M	5W	440	451	462	473
MIMIK 10 FLAT M	10W	751	771	790	810
MIMIK 10 FLAT B	10W	857	880	902	925
MIMIK 10 B C/I	10W	725	779	833	888
MIMIK 10 B C/I+T3	10W	657	707	756	806

Revision 25
01/25

Order Guide - Mimik 10

Order code example

M10F-B-AM-27K-120V-NA


M10-

Housing Style	Light Emission	Wattage	Optics	Finish	Kelvin	Voltage	Controls	Accessories					
M10 Standard	M (One-Way)	5W 5 watts	Standard Housing only Select one for M & two for B	AM Aluminum Metallic	27K 2700k	UNV 120-277V	(When selecting Flat housing, or B (two-way) emmissions, Dimming options must be remote)	(SEE PICTURES BELOW)					
M10F Flat	B (Two-Way)	10W 10 watts (max)	Leave Blank for Flat Housing	IG Iron Gray	3K 3000k								
*Flat Housing is only suitable for T3 Distribution		XX Specify wattage must be below max	T3 Type III	IR Iron Rust	35K 3500k		NA Non Dimming (standard)	L24 24" Vertical Panel					
			T4 Type IV	BK Textured Black	4K 4000k				0-10V 0-10V Dimming	L33 33" Vertical Panel			
			C/I 20° beam	WH Textured White	RED Static Red						ELV ELV Dimming	L48 48" Vertical Panel	
			10 10° Beam	CC Custom Color	GRN Static Green								RP7 7" Round Panel
			40 40° Beam		BLU Static Blue								
65 65° Beam		AMB Static Amber 590nm	D-Wedge Double Wedge Panel										
				RGBW RGBW (flat only)	SIGN Signage	REM Remote mounted Emergency battery back up	RDR Remote driver	CON2 (double-gang j-box, adaptor plate and 1/2" knockouts)					
								CON4 (double-gang j-box, adaptor plate and 3/4" knockouts)					
								BABAA Build America Buy America Act compliant					


80 CRI STANDARD - OTHER OPTIONS AVAILABLE

Performance in Lighting reserves the right to make all necessary changes without prior notice.


MIMIK 10




8" Square Panel



L24 Vertical Panel




L33 Vertical Panel




L48 Vertical Panel




Signage Panel




7" Round Panel




Wedge Panel



Double Wedge Panel




Fascade Cover



CON 2/4
Surface Mounted
J-box with Conduit
Entry

REMOTE RGBW ACCESSORIES

Power Supply



17433
Kit driver 48V



17096
Kit driver 48V WP


RF Controls



3104173
RGBW RF controller 4 channel
(0.35A each CH)



31041730
RGBW RF controller WP 4 channel
(0.35A each CH)



310429
RGBW hand held remote

DMX Controls



178973
RGBW DMX enabler/decoder 4
channel (0.35A each CH)



1789730
RGBW DMX enabler/decoder WP 4
channel (0.35A each CH)



11015
Terminating Resistor



110150
Terminating Resistor WP