

# INSERT+2 V BOLLARD

PERFORMANCE  
**IN** LIGHTING

powered by  
**GEWISS**



Pathway bollard series. Fixtures consist of:

- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free (<1%) precision die-cast aluminum housing and ring/faceplate.
- Copper-free (<1%) aluminum extruded post.
- Frosted, tempered, silk-screened, flat glass diffuser.
- Custom molded, anti-aging gasket(s).
- Custom MCPCB utilized to maximize heat dissipation and promote long LED life.
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Optional, integral, line-voltage, passive infrared motion sensor (PIR SENSOR versions).
- Pre-wired factory sealed cable for external electrical connection included.
- Steel ground base plate included for bollards.
- The luminaire may be configured with numerous options and multiple standard finishes.
- Not all options are available in all configurations. Consult factory for more information about specification sheet details to build your light.
- Product meets Buy American Act (BAA) requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.




## FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured



Scan here for  
installation instructions

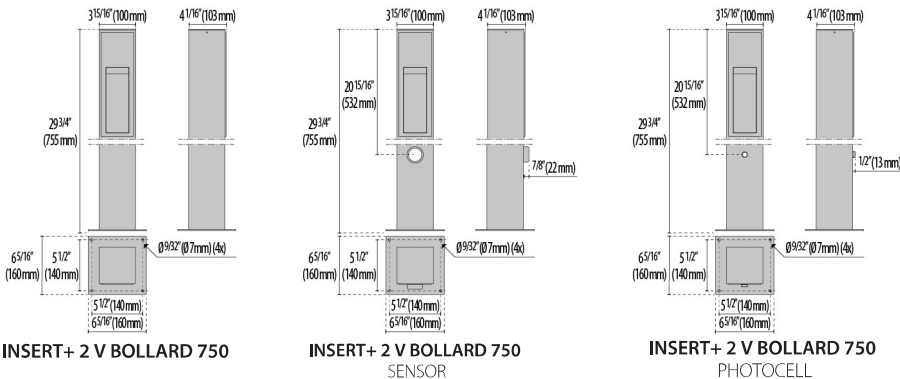

LUMEN OUTPUT					
	27K	30K	35K	40K	50K
9W	572	592	613	633	671

PERFORMANCE IN LIGHTING reserves the right to make all necessary changes without prior notice

PERFORMANCE IN LIGHTING USA, Inc.  
2621 Keys Pointe Conyers GA 30013 - United States  
Tel: 770 822 2115

info.usa@pil.lighting  
www.performanceinlighting.com/us

REVISION 03  
09/24

# Order Guide – INSERT+2 V BOLLARD



Order code example: I+2VB-30"-9W-30K-WH-UNV-ELV

I+2VB							
SERIES	Bollard Height	Wattage	CCT	Finish	Voltage	Controls	Accessories
I+2VB Insert+2 V Bollard	30" Standard Height	9W 9W* (max)	27K 2700K	AM Aluminum Metallic*	UNV 120-277V*	0-10V 0-10V Dimming*	BABAA Build America Buy America Act compliant
I+2VBPHC Insert+2 V Bollard Photocell	62" Max Height		30K* 3000K	IG Iron Gray*	120V 120V only	ELV ELV Dimming	
I+2VBOCC Insert+2 V Bollard OCC Sensor	XX" Specify Height Must Be Below Max		35K 3500K	IR Iron Rust			
			40K* 4000K	BK Textured Black			
			50K 5000K	WH Textured White*			
				CC Custom Color			
						Contact Factory for Remote driver options	

\*STANDARD OPTION, SHORTER LEAD TIME, NO MOQ\*  
80 CRI STANDARD - OTHER OPTIONS AVAILABLE